Slide in Electric Rangetops – Install Quick Specs
CTE 48” Wide

	Overall Dimensions				Cutout Dimensions		
Model	**A**	**B**	**D**	**E**	**F**	**G**	**H**
CTE48P	48”	25 9/16”	4 ¼”	5 1/16”	45 3/8”	4 ½”	24 ¾”

Installation Type
Slides into cabinet/countertop opening

Standard Features
- 304 Series, 1/8” thick stainless steel framed ceramic glass
- CTE48P is designed for wall, island or peninsula installations.
- Rapid response ribbon heating elements
- Multiple cooking zone layout to accommodate a variety of pan sizes and shapes
- Shallow rough-in box depth to allow for extra cabinet storage below rangetop
- Front positioned knobs to maximize cooking surface area

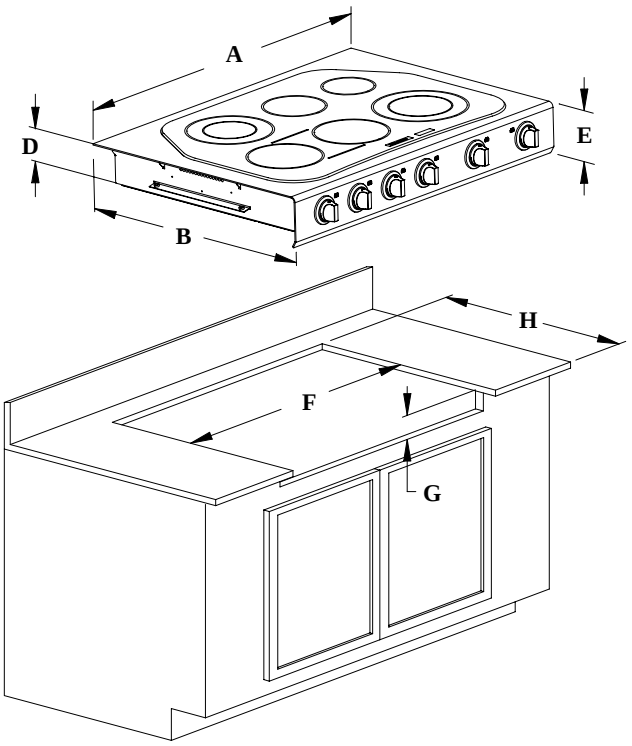

Finishes
- Black textured Ceramic Glass with Stainless Steel frame

Maximum Power Supply Required
50 Amps @ 208/240 V AC, 3-wire, 60 Hz, single phase
3’ flexible conduit (located in the right rear of the cooktop) comes with the unit.

Cooktop Carton Weight:
CTE48P = 100 lbs.

LISTED 90ZK C

© Copyright 2009 Wind Crest by CNP Industries

Install Quick Specs are for planning purposes only. Please refer to the detailed installation instructions, prior to making any cutouts.